

PRODUCT SPECIFICATIONS

DWV EXPANDER ELBOWS 45 & 90 DEGREES


- Suitable for use in M, H1, H2, E and P class soil sites.
- Ideal for installations where lack of height could be an issue (eg. waffle slab and shallow drains).
- Ideal below inspection openings.
- Can be installed either vertically or horizontally.
- Comes packaged in a non-biodegradable 90um or 100um plastic bag which can be used as installation wrapping if required.
- To initiate movement, this joint must be 'cracked' by pushing downwards against a hard surface until joint is closed.
- Install and test to AS3500.



88 Degrees
(17317 & 17318)



45 Degrees
(17319 & 17320)

ID	Ø mm	DEGREE	EXPANSION	
17317	100	88	155	10
17318	100	88	240	9
17319	100	45	155	12
17320	100	45	240	11




PLASTEC AUSTRALIA
ENCOURAGES THE REUSE
AND RECYCLE OF ALL OUR
PACKAGING MATERIALS
WHERE EVER POSSIBLE

MEASUREMENTS (MM)

88 Degrees
(17317 & 17318)

17317 - 411.2MM
+155MM EXPANSION

17318 - 495.2MM
+240MM EXPANSION

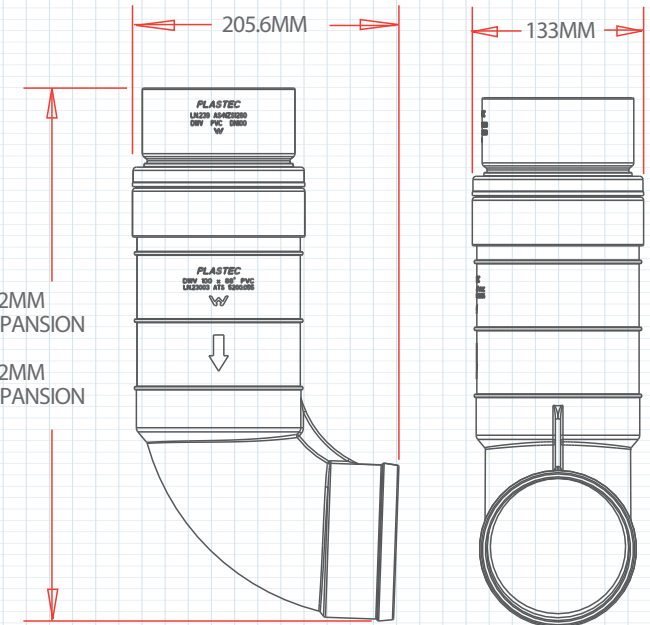

45 Degrees
(17319 & 17320)

17319 - 386.7MM
+155MM EXPANSION

17320 - 470.7MM
+240MM EXPANSION

