HDPE COMBINATION JOINTS


COMBINATION SWIVEL & EXPANSION



Specification

ID	∅	A	B	<|>
16875	110	190	261	+/- 30mm
18353	160	240	262	+/- 30mm

- Can be electro-fused or butt welded
- For above and below ground
- For use in H1, H2 and E Class soils
- Total travel 60mm
- Protection for thermal movement
- Watermarked to WMTS-055
- Tested at 85kpa
- UV stabilized

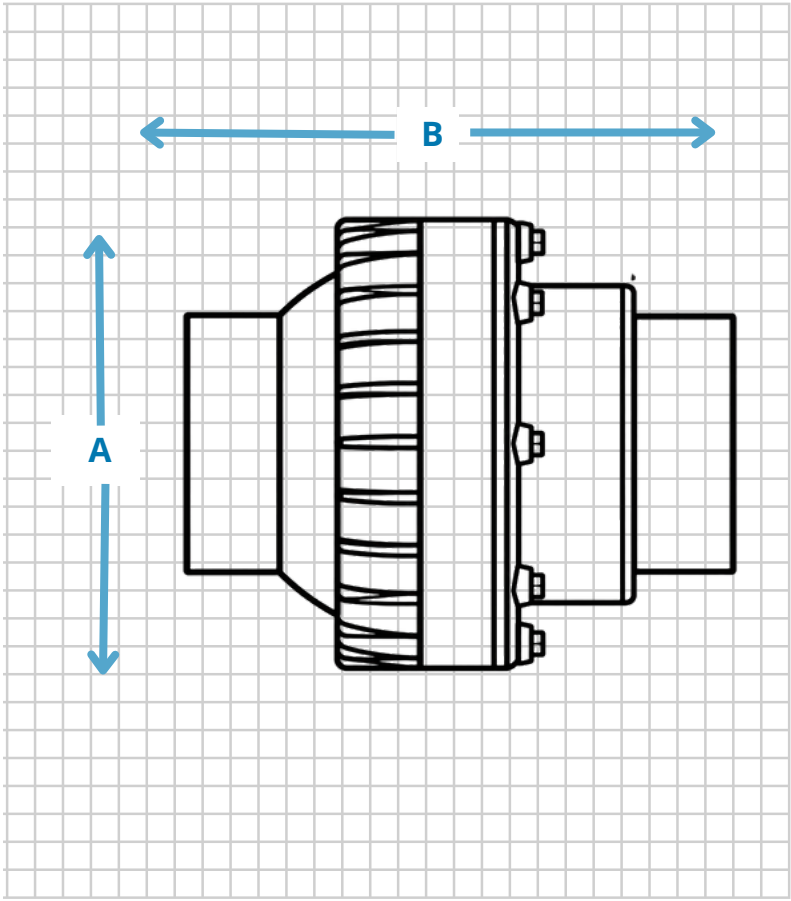

PLASTEC
INNOVATIVE PLUMBING SOLUTIONS
Phone: (07) 5413 4444
Email: sales@plastec.com.au
www.plastec.com.au