
TECH DATA

AIR ADMITTANCE TRAPS




S & P Trap

ID	Ø	
18866	40	32
18867	50	20

- Built in air admittance valve
- Approved for installations up to 60 degrees celsius
- Predrilled 20mm overflow connection comes with blanking plug
- Approved for 3 fixture units
- Valve bung included for testing

AIR FLOW TESTS

\varnothing	PRESSURE	RESULT	FIXTURE
40	OPEN	0.4 kpa	
	-250pa	1.35 L/s	3.1
	-150pa	0.75 L/s	
50	OPEN	0.4 kpa	
	-250pa	1.35 L/s	3.7
	-150pa	1.0 L/s	

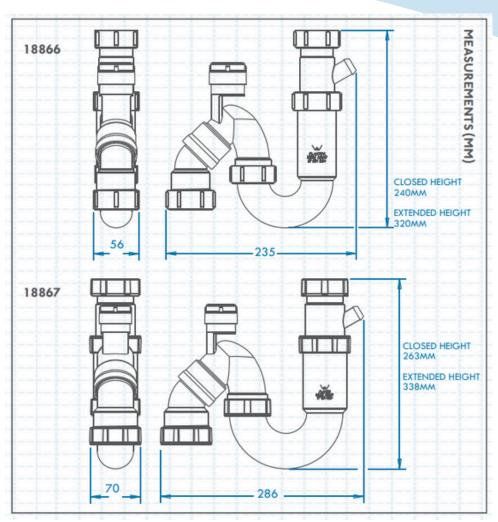





Phone: (07) 5413 4444 Email: sales@plastec.com.au www.plastec.com.au





